

MASTER[®]



FOR HOME & OFFICE USE

www.mcsworld.com




MCS ITALY



MCS CENTRAL EUROPE



MCS RUSSIA



MCS CHINA

MCS ITALY: Via Tione 12, 37010 Pastrengo (VR), Italy, (0039) 045 6770533

MCS CENTRAL EUROPE: ul. Magazynowa 5a, 62-023 Gądki, Poland, (0048) 61 654 4000

MCS RUSSIA: Kalinina 46/3/3 office 3, 142802 Stupino, Russia, (007) 496 65 373 65

MCS CHINA: Unit 11, No. 198 Changjian Rd, Baoshang Industrial Zone, Shanghai, China, 200949, (0086) 21 – 61486668

Electric fan heaters	4
Propane/butane gas heaters	5
Direct oil heaters	6
Indirect oil heater	7
Ceramic gas radiator	8
Gas radiators	9


B 5 ECA
WHERE TO USE:

- Agriculture
- Renovations
- Garages
- Shops
- Offices
- Basements
- Houses
- Warehouses



SPECIFICATION		B 1,8ECA	B 3ECA	B 5 ECA
Power	kW	0,65/1,3/2	1,5/3	2,5 / 5
Rated current	A	8,7	13	7,2
Power suply	V/Hz	230/50	230/50	400 / 50
Air displacement	m³/h	184	288	557
Switch pos. 1		OFF	OFF	OFF
Switch pos. 2		0,65	fan	fan
Switch pos. 3	kW	1,3	1,5	2,5
Switch pos. 4	kW	2	3	5
Temperature range	°C	5-35	5-35	5 - 35
Protection		IPX4	IPX4	IPX4
Packaging dimensions	mm	250x240x390	310x300x440	260x300x400
Gross weight	kg	3,2	6	5,7



BLP 16

WHERE TO USE:

- Agriculture
- Gardening
- Industry
- Renovations



SPECIFICATION		BLP 11	BLP 16	BLP 26
Ignition		piezo	piezo	piezo
Pressure	bar	0,3	0,7	1,5
Max power	kW	10,5	16	33
Power supply	V/Hz	220-240/50	220-240/50	220-240/50
Max gas consumption	kg/h	0,76	1,16	2,4
Air displacement	m ³ /h	300	300	1000
Thermostat control		no	no	no
Packaging dimensions	mm	400x210x310	490x210x300	590x260x360
Gross weight	kg	5,1	5,9	9,4

Ventilation of the room is necessary to prevent a deficiency in oxygen supply.


B 35 CEL
WHERE TO USE:

- Warehouses
- Renovations
- Workshops
- Agriculture



SPECIFICATION		B 35CEL	B 65CEL
Power	kW	10	18,5
Air displacement	m ³ /h	280	400
Power supply	V/Hz	220-240/50	220-240/50
Fuel consumption	kg/h	0,86	1,55
Tank capacity	l	15	19
Rated current	A	0,8	1
Packaging dimensions	mm	810x350x460	810x350x460
Gross weight	kg	15,6	17

Ventilation of the room is necessary to prevent a deficiency in oxygen supply.



BV 69

WHERE TO USE:

- Warehouses
- Offices
- Renovations
- Gardening



SPECIFICATION		BV 69
Power	kW	20
Air displacement	m ³ /h	1.550
Fuel consumption	kg/h	1,67
Tank capacity	l	35
Rated current	A	1,5
Power supply	V/Hz	220-240/50
Flue tube	mm	120
Blast opening	mm	203
Packaging dimensions	mm	1200x410x540
Gross weight	kg	36

Ventilation of the room is necessary to prevent a deficiency in oxygen supply.


450 CR
WHERE TO USE:

- Renovations
- Gardening
- Agriculture



SPECIFICATION		450CR
Max. power	kW	4,2
Max. gas consumption	kg/h	0,31
Gas type		propae-butae
Power range		3 steps
Antytilt switch		yes
Wheels		yes
Packaging dimensions	mm	460x330x760
Gross weight	kg	9,75

Ventilation of the room is necessary to prevent a deficiency in oxygen supply.



BP 13



34 CR

WHERE TO USE:


- House patios
- Restaurants
- Tents



SPECIFICATION		34 CR	BP 13
Max. power	kW	3,4	13
Max. gas consumption	kg/h	0,24	1,06
Gas type		propae - butae	propae - butae
Power range		2-steps	2-steps
Antytilt switch		no	yes
Packaging dimensions	mm	160x350x460	450x390x900
Gross weight	kg	2,6	27

Ventilation of the room is necessary to prevent a deficiency in oxygen supply.

- Coupling set

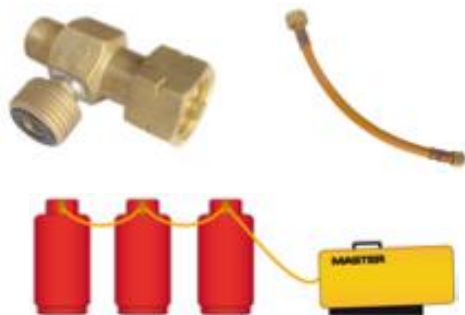

- Room thermostat TH 2
for CEL models



F.M.PRACOS, spol.sr.o.

Štursova 2a, 616 00 Brno
tel./fax: +420 548 535 553, +420 541 233 573
email: pracos@pracos.cz
web: www.pracos.cz

Data, descriptions and pictures are for indication only and absolutely not binding.
The Company reserves the right to modify or improve them without prior notice.

Copyright Master Climate Solutions 2012 PL